

QUAD 10 / 13



SCONCES OUTDOOR

location:

SPECIFICATIONS:

DESCRIPTION

Wall-mounted sconce featuring handcrafted glass and grid metal face plate. **ADA-compliant.**

LAMPING

Quad 10: 9W Replaceable source, 120V, dimmable, 90+ CRI, 3000°K CCT, 865 lumens, 25,000 hours, lamp included.

Quad 13: 15W Replaceable source, 120V, dimmable, 90+ CRI, 3000°K CCT, 1680 lumens, 25,000 hours, lamp included.

DIFFUSER

Diffuser shall be handcrafted Opal Matte glass with a grid decorative face plate.

Quad 10: 10" L x 10" H x 2.75" D **Quad 13:** 13" L x 13" H x 2.75" D

CONSTRUCTION


Stamped aluminum fitter is powder coated white. Glass is secured by stainless steel set screws.

MOUNTING

Installs directly to a 4" octagonal outlet box. 75°C supply wire required for incandescent lamping.

IARFIS

UL or ETL Listed. Suitable for Wet Locations (interior or exterior use).

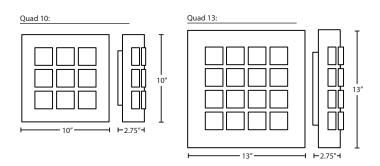




FIXTURE	- LAMP OPTIONS -METAL FINISH
QUAD13 13" Opal Matte	LED 15W LED BK Black 1680 lumens BR Bronze SL Silver

Ex. QUAD13-LED-SL

Quad 13 LED Outdoor Sconce, Opal Matte Shade, Silver Finish





OPAL/ BLACK (QUAD10) & OPAL/SILVER (QUAD13)

QUAD10-LED-BR OPAL/BRONZE QUAD10-LED-BK OPAL/BLACK





All dimensions provided are nominal. Allowance must be made for dimensional tolerance in handcrafted glasses.

REV 5/19